



Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at
www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

FEATURES

- Linearly decreasing PWM frequency
- Green-mode under light-load and zero-load conditions
- Constant voltage (CV) and constant current (CC)
- No secondary feedback
- Low start-up current (8 μ A)
- Low operating current (3.6mA)
- Leading-edge blanking
- Constant power limit
- Universal AC input range
- Synchronized slope compensation
- 140°C OTP sensor with hysteresis
- V_{DD} over-voltage clamping
- Cycle-by-cycle current limiting
- Under-voltage lockout (UVLO)
- Fixed PWM frequency with hopping
- Gate output maximum voltage clamped at 17V
- Small SOT-26 package

APPLICATIONS


Low-power flyback power converters, such as:

- Battery chargers for cellular phones, cordless phones, PDAs, digital cameras, and power tools
- Power adapters for ink jet printers, video game consoles, and portable audio players
- Open-frame SMPS for TV/DVD standby and other auxiliary supplies, home appliances, consumer electronics, and PC 5V standby-power
- Replacements for linear transformers and RCC SMPS


DESCRIPTION

This highly integrated PWM controller provides several features to enhance the performance of low-power flyback converters. To minimize standby power consumption, the proprietary green-mode function provides off-time modulation to linearly decrease the switching frequency under light-load and zero-load conditions. This green-mode function enables the power supply to meet international power conservation requirements. The supply voltage, V_{DD} , is also used for feedback compensation, to regulate the output voltage without requiring a conventional TL431 and a photo-coupler. The typical start-up current is only 8 μ A, while the typical operating current can be as low as 3.6mA. A large start-up resistance could be used to achieve even higher power conversion efficiency. SGP400 integrates a frequency hopping function, which helps reduce EMI emission of a power supply with minimum line filters. Built-in synchronized slope compensation maintains the stability of peak current-mode control. Proprietary internal compensation ensures constant output power limiting over a universal range of AC input voltages, from 90V_{AC} to 264V_{AC}. Pulse-by-pulse current limiting ensures a constant output current, even if a short-circuit occurs. Also, the internal protection circuit disables PWM output if V_{DD} exceeds 22.7V. The gate output is clamped at 16.7V to protect the power MOS from over-voltage damage. The built-in over temperature protection (OTP) function shuts down the controller at 140°C with a 30°C hysteresis. The SGP400, designed to provide a low-cost total solution for flyback converters, is available in a small footprint, 6-pin, SOT-26 package.


TYPICAL APPLICATION

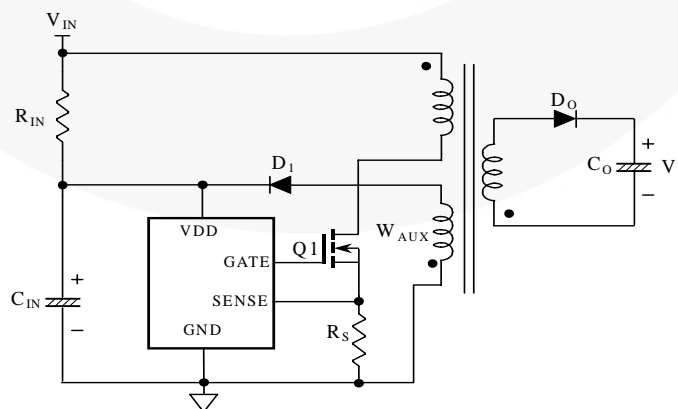

MARKING INFORMATION





XXX: AAK=SGP400;
 : Lead Free
M: Mask Version
W: Week code A~Z=W1~W26
 A~Z=W27~W52



D: D=DIP
P: Z=Lead free
 Null=Regular package
XXXXXXXX: Wafer Lot
Y: Year
WW: Week
V: Assembly Location

PIN CONFIGURATION

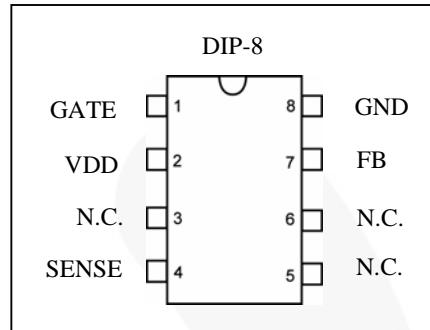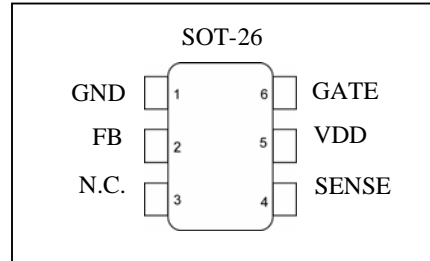

This product is not recommended for shipping into the United States. It may be subject to court injunction. See <http://www.fairchildsemi.com/about-fairchild/media-center/litigation>.


ORDERING INFORMATION

| Part Number | PWM Frequency | Pb-Free | Package |
|-------------|---------------|---------|--------------|
| SGP400TZ | 65KHz | | 6-Pin SOT-26 |
| SGP400DZ | 65KHz | | 8-Pin DIP-8 |

PIN DESCRIPTIONS

| Name | Pin No. | | Type | Function |
|-------|---------|--------|---------------|--|
| | DIP-8 | SOT-26 | | |
| GATE | 1 | 6 | Driver Output | The totem-pole output driver to drive the power MOSFET. |
| VDD | 2 | 5 | Supply | Power supply. |
| NC | 3 | NA | | NC pin. |
| SENSE | 4 | 4 | Analog Input | Current sense. It senses the voltage across a sensed resistor. To provide over-current protection, PWM output is disabled if the voltage exceeds an internal threshold. This pin also provides current information for current-mode control. |
| NC | 5 | 3 | | NC pin. |
| NC | 6 | NA | | NC pin. |
| FB | 7 | 2 | Analog Input | Feedback. The FB pin provides feedback information to the internal PWM comparator. This feedback is used to control the duty cycle. When no feedback is provided, this pin is left open. |
| GND | 8 | 1 | Supply | Ground. |

BLOCK DIAGRAM

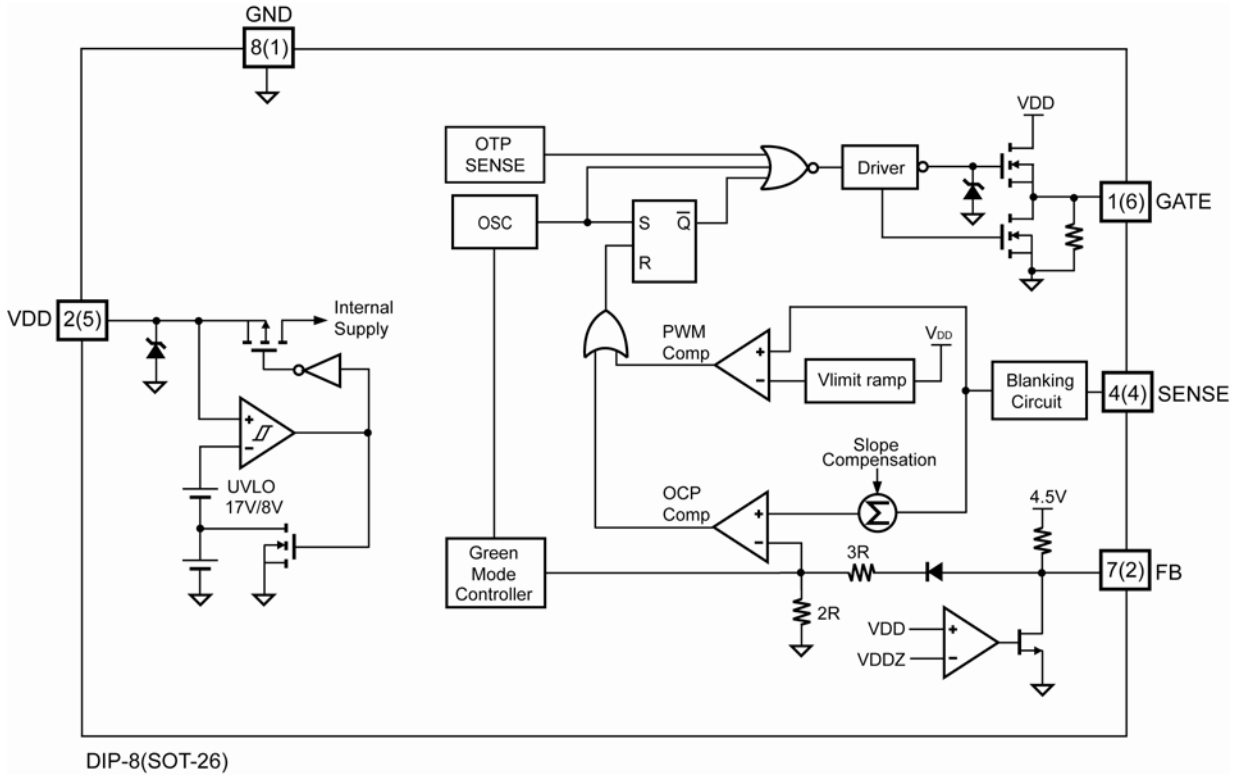

Low-Power Green-Mode PWM Flyback Power Controller without Secondary Feedback
SGP400
ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit | |
|--------------------|---|-------------|-------|------|
| V _{VDD} | DC Supply Voltage* | 30 | V | |
| V _{FB} | FB Pin Input Voltage | -0.3 to 7.0 | V | |
| V _{SENSE} | Sense Pin Input Voltage | -0.3 to 7 | V | |
| P _D | Power Dissipation (T _A =85°C) | SOT-26 | 247 | mW |
| | | DIP-8 | 478 | |
| R _{θJA} | Thermal Resistance (Junction-to-Air)** | SOT-26 | 263.3 | °C/W |
| | | DIP-8 | 135.7 | |
| R _{θJC} | Thermal Resistance (Junction-to-Case)** | SOT-26 | 119.6 | °C/W |
| | | DIP-8 | 67.1 | |
| T _J | Operating Junction Temperature | -40 to +125 | °C | |
| T _{STG} | Storage Temperature Range | -55 to +150 | °C | |
| T _L | Lead Temperature (Wave Soldering or Infrared, 10 Seconds) | 260 | °C | |
| ESD | Electrostatic Discharge Capability, Human Body Model | 4.0 | KV | |
| | Electrostatic Discharge Capability, Machine Model | 200 | V | |

* All voltage values, except differential voltages, are given with respect to the network ground terminal.

* Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device.

** Thermal resistance • _{JA} test board size: SOT 18×12×1.6mm/FR4; DIP 40×35×1.6mm/FR4.

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Value | Unit | |
|-----------------|-------------------------------|----------------------------|-------|---|
| V _{DD} | DC Supply Voltage | With Secondary Feedback | <20 | V |
| | | Without Secondary Feedback | <22.7 | V |
| T _A | Operating Ambient Temperature | -20 to +85 | °C | |

* For proper operation.

ELECTRICAL CHARACTERISTICS (V_{DD}=15V, T_A=25°C, unless noted)
V_{DD} Section

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|-----------------------|--|---|------|------------------------------|------|------|
| V _{DD-ON} | Turn-On Threshold Voltage | | 16 | 17 | 18 | V |
| V _{DD-OFF} | Turn-Off Threshold Voltage | | 7.5 | 8.0 | 8.5 | V |
| I _{DD-ST} | Start-up Current | V _{DD} =V _{DD-ON} -0.1V | | 8 | 20 | μA |
| I _{DD-OP} | Operating Supply Current | V _{DD} =15V, C _L =1nF | | 3.6 | 4.6 | mA |
| V _{DD-G OFF} | V _{DD} Low-threshold Voltage to Exit Green-off Mode | | | V _{DD-OFF} + 1.2 | | V |


Feedback Input Section

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|----------------------|---|---------------------------------|------|------|------|------|
| A _V | Input-Voltage to Current-Sense Attenuation | | | 2/5 | | V/V |
| V _{FB-OPEN} | Open-Loop Voltage | | 4.5 | | | V |
| Z _{FB} | Input Impedance | I _{FB} =0.1mA to 0.2mA | | 2.4 | | KΩ |
| V _{DD-FB} | V _{DD} Feedback Threshold Voltage* | FB is Open | 20.7 | 22.7 | 24.7 | V |
| | | I _{FB} =0.4mA | 18.4 | 20.4 | 22.4 | V |

* The feedback input is pulled by a transistor controlled by the V_{DD} signal while V_{DD} ≥ V_{DDZ}.

Current Sense Section

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|-------------|---|----------------|------|------|------|------|
| t_{PD} | Propagation Delay | | | 100 | 150 | ns |
| V_{STHVA} | Current Limiting Valley Threshold Voltage | $V_{DD}=18V$ | | 0.84 | | V |
| | | $V_{DD}=15V$ | | 0.76 | | V |
| | | $V_{DD}=10V$ | | 0.62 | | V |
| V_{STHFL} | Current Limiting Flat Threshold Voltage | $V_{DD}=18V$ | | 0.98 | | V |
| | | $V_{DD}=15V$ | | 0.88 | | V |
| | | $V_{DD}=10V$ | | 0.71 | | V |
| t_{LEB} | Leading-Edge Blanking Time | | 210 | 310 | 410 | ns |

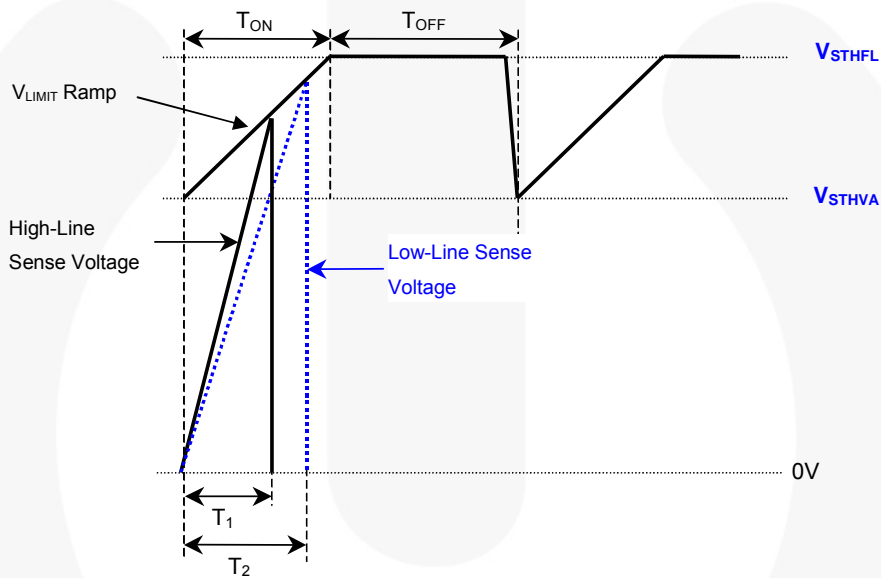

Oscillator Section

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|-------------|---|---------------------------|------|----------------|------|-------|
| F_{OSC} | Frequency | Center Frequency | 62 | 65 | 68 | KHz |
| | | Hopping Range | ±4.1 | ±4.6 | ±5.1 | |
| t_{HOP} | Hopping Period | | 4.1 | 4.0 | 5.1 | ms |
| F_{OSC-G} | Green-Mode Frequency | | 19.5 | 22.0 | 24.5 | KHz |
| V_{FB-N} | Green-Mode Entry FB Voltage | | 2.4 | 2.6 | 2.8 | V |
| V_{FB-G} | Green-Mode Ending FB Voltage | | | $V_{FB-N}-0.7$ | | V |
| S_G | Green-Mode Modulation Slope | | 40 | 70 | 100 | Hz/mV |
| F_{DV} | Frequency Variation vs. V_{DD} Deviation | $V_{DD}=10$ to $20V$ | | | 2 | % |
| F_{DT} | Frequency Variation vs. Temperature Deviation | $T_A=-20$ to $85^\circ C$ | | 1.5 | 5.0 | % |

Output Section

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|-------------------------|------------------------------|---|------|------|------|------|
| DCY _{MAX} | Maximum Duty Cycle | | 70 | 75 | 80 | % |
| V _{GATE-L} | GATE Low Voltage | V _{DD} =15V, I _O =10mA | | | 1.5 | V |
| V _{GATE-H} | GATE High Voltage | V _{DD} =15V, I _O =-10mA | 8 | | | V |
| t _r | GATE Rising Time | V _{DD} =15V, C _L =1nF | 150 | 200 | 250 | ns |
| t _f | GATE Falling Time | V _{DD} =15V, C _L =1nF | 70 | 90 | 110 | ns |
| V _{GATE-CLAMP} | GATE Output Clamping Voltage | V _{DD} =20V | 16 | 17 | 18 | V |







Over-Temperature Protection (OTP)






| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|----------------------|--|----------------|------|------|------|------|
| Temp _{-OTP} | Protection Junction Temperature [*] | | | 140 | | °C |
| Temp-Restart | Restart Junction Temperature ^{**} | | | 110 | | °C |

* When activated, the output is disabled and the latch is turned off.

** The threshold temperature for enabling the output and resetting the latch after over-temperature protection has been activated.

TYPICAL CHARACTERISTICS

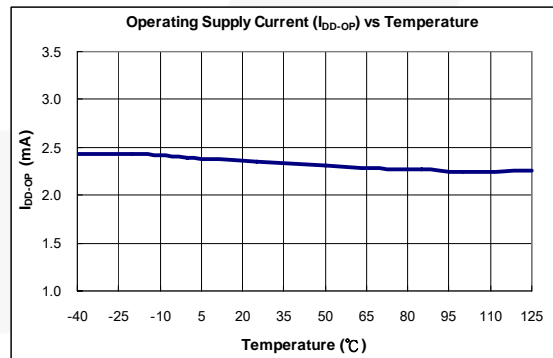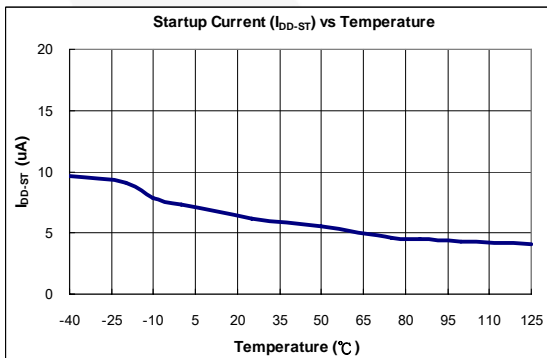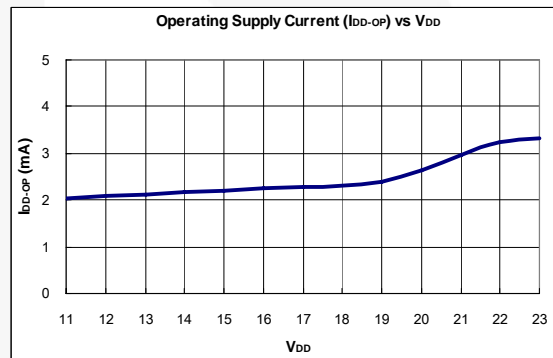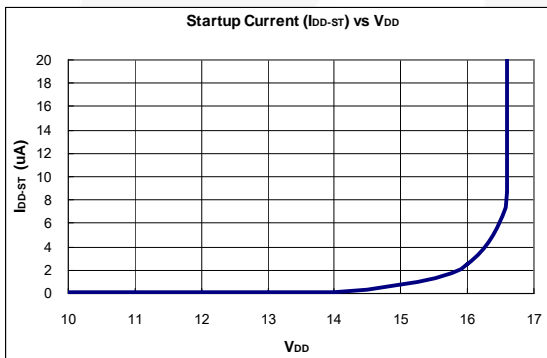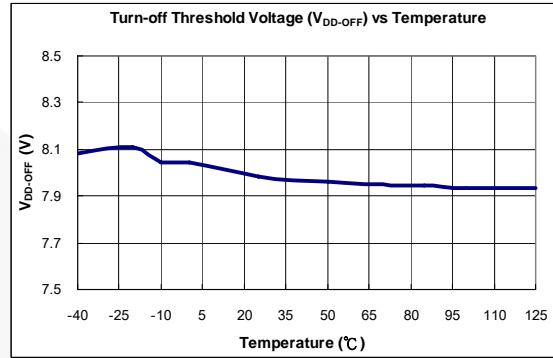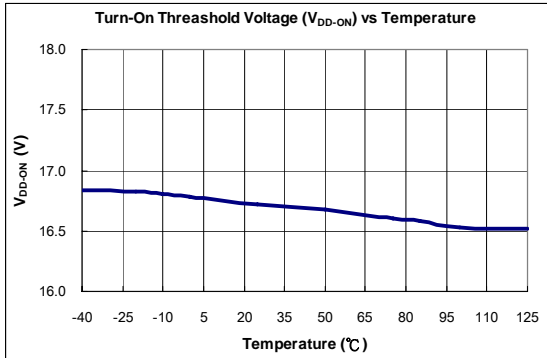

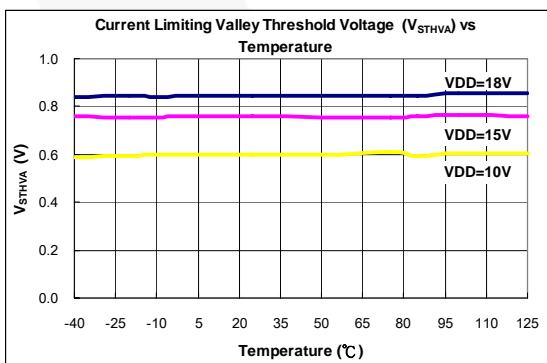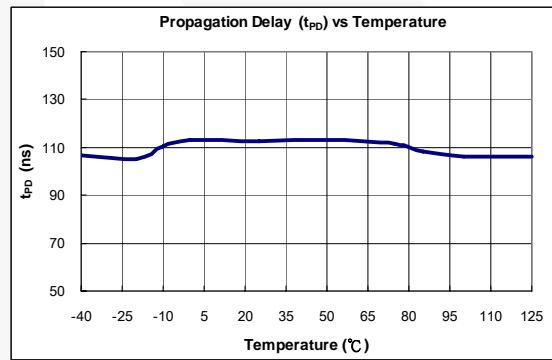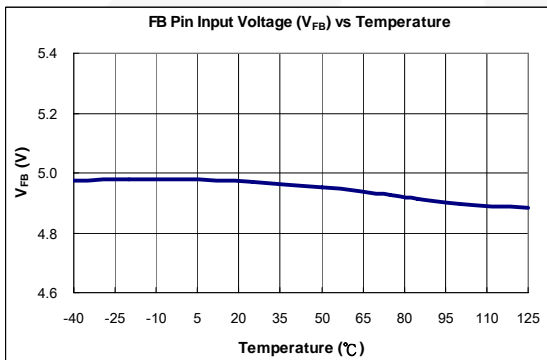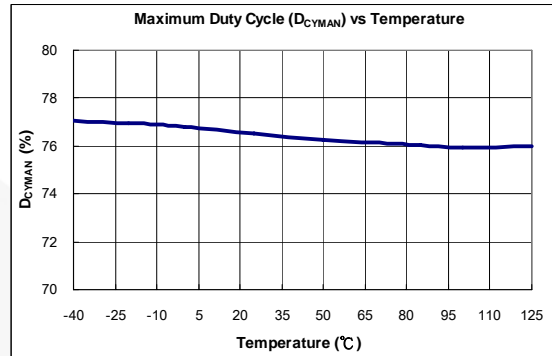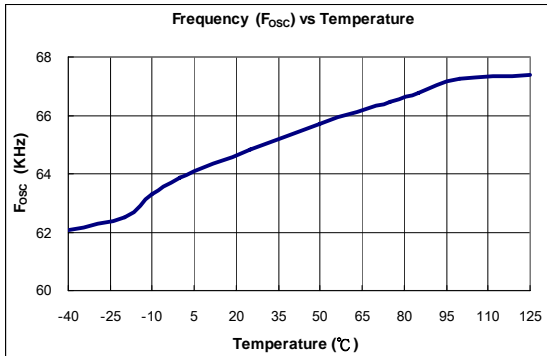

OPERATION DESCRIPTION

SGP400 devices integrate many useful functions for low-power switch-mode power supplies. The following descriptions highlight key features of the SGP400.

Start-up Current

The required start-up current is only 8 μ A, which allows a high-resistance, low-wattage start-up resistor to be used to supply the controller's start-up power. A 1.5M Ω /0.25W start-up resistor can be used over a wide input range (100V-240V AC) with very little power loss.

Operating Current

The operating current is normally 3.6mA. The low operating current results in higher efficiency and reduces the required V_{DD} hold-up capacitance. A 10 μ F/25V V_{DD} hold-up capacitor can be used over a wide input range (100V-240V AC) with very little power loss.

Green-Mode Operation

The proprietary green-mode function provides off-time modulation to linearly decrease the switching frequency under light-load and zero-load conditions. The on-time is limited to provide better protection against brownouts and other abnormal conditions.

This green-mode function dramatically reduces power consumption under light-load and zero-load conditions. Power supplies using the SGP400 can easily meet international restrictions regarding standby power consumption.

Constant Voltage (CV), Constant

Current (CC) without Feedback

The SGP400 can tightly regulate the output voltage and provide over-current protection without requiring secondary-side feedback signals. For improved CV and CC accuracy, the transformer leakage inductance should be reduced as much as possible.

Over-Temperature Protection (OTP)

The SGP400 has a built-in temperature sensing circuit to shut down PWM output if the junction temperature exceeds 140°C. While PWM output is shut down, the V_{DD} voltage gradually drops to the UVLO voltage. Some of the internal circuits are shut down and V_{DD} gradually starts increasing again. When V_{DD} reaches 17V, all the internal circuits, including the temperature sensing circuit, start operating normally. If the junction temperature is still higher than 140°C, the PWM controller shuts down immediately. This situation continues until the temperature drops below 110°C. The PWM output is then turned back on. The temperature hysteresis window for the OTP circuit is 30°C.

V_{DD} Over-Voltage Clamping

V_{DD} over-voltage clamping is built-in to prevent damage from over-voltage conditions. When V_{DD} exceeds 22.7V, PWM output is shut down. Over-voltage conditions may be caused by an open photo-coupler loop or a short-circuit in the output.

Oscillator Operation

The oscillation frequency is fixed at 65KHz.

Leading-Edge Blanking

Each time the power MOSFET switches on, a spike occurs at the sense resistor. To avoid premature termination of the switching pulse, a 310ns leading-edge blanking time is built in. Conventional RC filtering is not necessary. During the blanking period, the current-limit comparator is disabled and cannot switch off the gate drive.

Constant Output Power Limit

When the SENSE voltage across the sense resistor, R_s , reaches the threshold voltage (around 1.0V), the output GATE drive is turned off after a small propagation delay t_{pd} . This propagation delay introduces additional current, proportional to $t_{pd} \cdot V_{IN} / L_p$. The propagation delay is nearly constant, regardless of the input line voltage V_{IN} . Higher input line voltages result in larger additional currents. Under high input-line voltages, the output power limit is higher than under low input-line voltages.

Over a wide range of AC input voltages, the variation can be significant. To compensate for this, the threshold voltage is adjusted by adding a positive ramp (V_{LIMIT_RAMP}). This ramp signal can vary from 0.77V to 1.05V and it flattens out at 1.05V. A smaller threshold voltage forces the output GATE drive to terminate earlier, reducing total PWM turn-on time and making the output power equal to that of the low line input. This proprietary internal compensation feature ensures a constant output power limit over a wide range of AC input voltages ($90V_{AC}$ to $264V_{AC}$).

Under-voltage Lockout (UVLO)

The turn-on/turn-off thresholds are fixed internally at 17V/8V. To enable the SGP400 during start-up, the hold-up capacitor must first be charged to 17V through the start-up resistor.

The hold-up capacitor continues to supply V_{DD} before energy can be delivered from the auxiliary winding of the main transformer. V_{DD} must not drop below 8V during this start-up process. This UVLO hysteresis window ensures that the hold-up capacitor can adequately supply V_{DD} during start-up.

Gate Output

The BiCMOS output stage is a fast totem pole gate driver. Cross-conduction has been avoided to minimize heat dissipation, increase efficiency, and enhance reliability. The output driver is clamped by an internal 17V Zener diode to protect the power MOSFET transistors against any harmful over-voltage gate signals.

Slope Compensation

The sensed voltage across the current sense resistor is used for current-mode control and pulse-by-pulse current limiting. The built-in slope compensation function improves power supply stability and prevents sub-harmonic oscillations that normally would occur because of peak current mode control. A positively sloped, synchronized ramp is activated with every switching cycle. The slope of the ramp is:


$$\frac{0.33 \times \text{Duty}}{\text{Duty(max)}} \quad (1)$$

Noise Immunity

Noise from the current sense or the control signal may cause significant pulse-width jitter, particularly in continuous-conduction mode. Slope compensation helps alleviate this problem. Good placement and layout practices should be followed. Avoid long PCB traces and component leads. Compensation and filter components should be located near the SGP400. Finally, increasing the power-MOS gate resistance is advised.

REFERENCE CIRCUIT


3W Flyback 5V/0.6A Circuit, without Secondary-Side Feedback

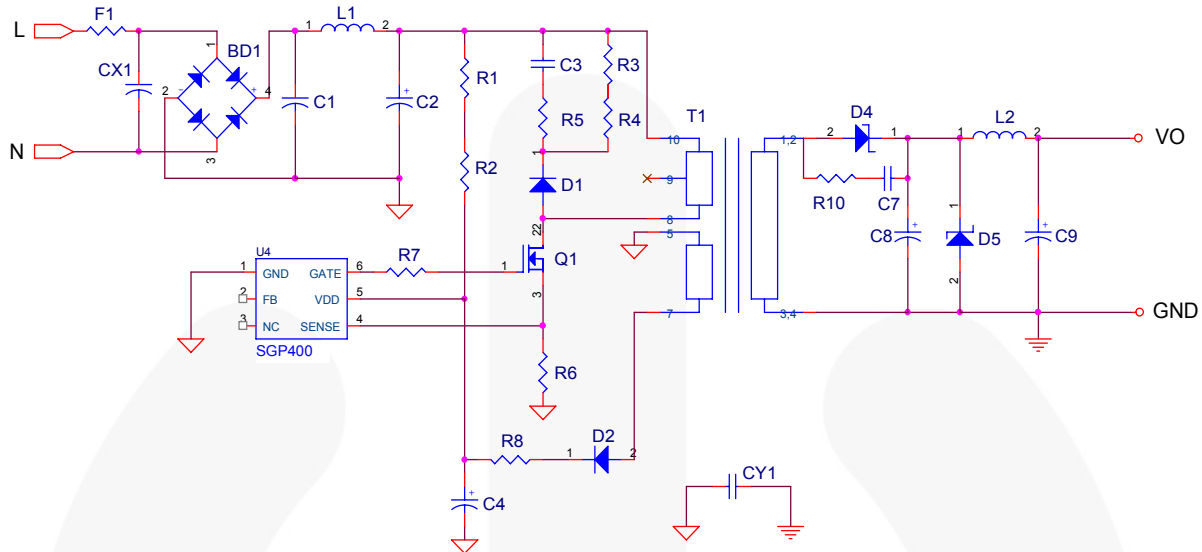

BOM

| Symbol | Component | Symbol | Component |
|----------------------|--------------------|--------------|--------------------------|
| BD1 (Reference only) | BD DI106 1A/600V | F1 | R 1Ω/0.5W |
| CX1 (Option) | YC 472pF/400V (Y1) | L1 | Inductor 20mH 6•8mm |
| CY1 (Option) | YC 102pF/400V (Y1) | L2 | Inductor 10μH 6mm |
| C1 | CC 0.01μF/500V | Q1 | MOSFET 1A/600V |
| C2 | EC 10μF/400V 105°C | R1,R2 | R 750kΩ/1206 |
| C3 | CC 1000pF/500V | R3,R4 | R 47kΩ/1206 |
| C4 | EC 10μF/50V | R5 | R 47Ω/1206 |
| C7 (Option) | CC 102pF/100V 1206 | R6 | R 4.7Ω/0.5W |
| C8 | EC 470μF/10V 105°C | R7 | R 100Ω/0805 |
| C9 | EC 220μF/10V 105°C | R8 | R 10Ω/1206 |
| D1 | Diode FRI07 | R10 (Option) | R 10Ω/1206 |
| D2 | Diode FR102 | T1 | Transformer EE-16 |
| D4 | Diode SB360 | U4 | IC SGP400 (Green PWM IC) |
| D5 (Option) | ZD 6.8V/0.5W | | |

3W Flyback 5V/0.6A Circuit, with Secondary-Side Feedback

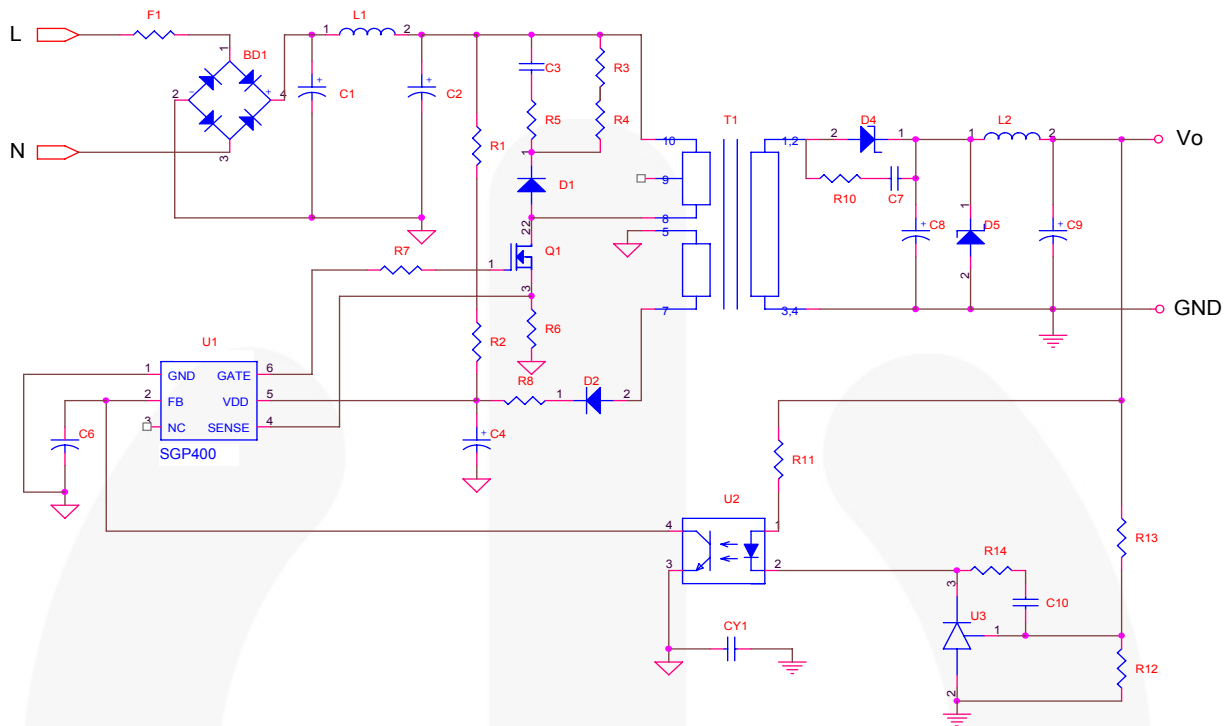


BOM

| Symbol | Component | Symbol | Component |
|----------------------|-------------------------------------|--------|--------------------------|
| BD1 (Reference only) | BD DI106 1A/600V | L2 | Inductor 10 μ H 6mm |
| CY1 (Option) | YC 102p/400V | Q1 | MOSFET 1A/600V |
| C1 | CC 0.01 μ F/500V | R1,R2 | R 750k Ω /1206 |
| C2 | EC 10 μ F/400V 105 $^{\circ}$ C | R4,R3 | R 47k Ω /1206 |
| C3 | CC 1000p/500V | R5 | R 47 Ω /1206 |
| C4 | EC 10 μ /50V | R6 | R 4.7 Ω /0.5W |
| C6 | CC 472p/0805 | R7 | R 100 Ω /0805 |
| C7 | CC 102p/100V 1206 | R10 | R 10 Ω /1206 |
| C8 | EC 470 μ /10V 105 $^{\circ}$ C | R8 | R 10 Ω /1206 |
| C9 | EC 470 μ /10V 105 $^{\circ}$ C | R11 | R 100 Ω / 1/8W |
| C10 | CC 222p/0805 | R12 | R 33k Ω /0805 |
| D1 | Diode FR107 | R13 | R 33k Ω / 1/8W |
| D2 | Diode FR102 | R14 | R 4.7k Ω /0805 |
| D4 | Diode SB360 | T1 | Transformer EE-16 |
| D5 (Option) | ZD 6.8V/0.5W | U1 | IC SGP400 (Green PWM IC) |
| F1 | R 1 Ω /0.5W Resistor | U2 | IC PC817 |
| L1 | Inductor 20mH 6*8mm | U3 | IC TL431 |

PACKAGE INFORMATION


6 PINS-SOT (T)

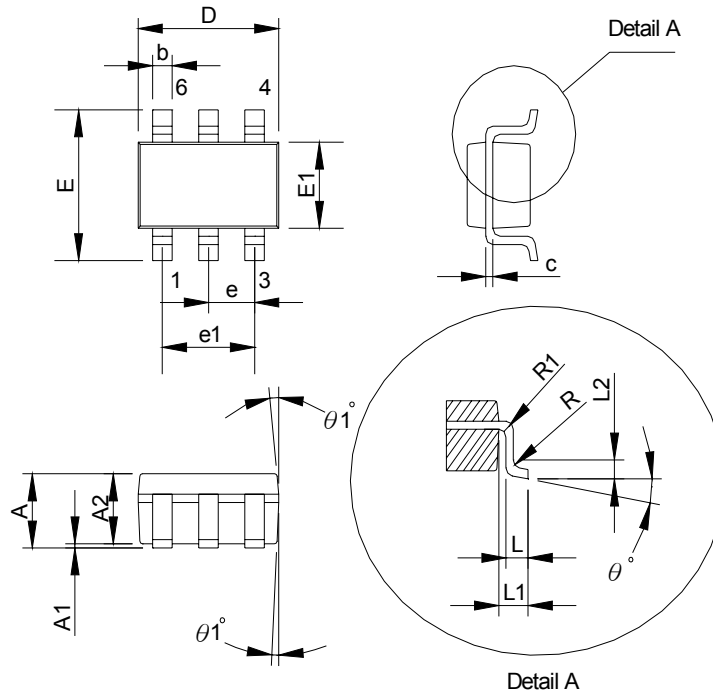

Dimensions:

| Symbol | Millimeters | | | Inches | | |
|---------|-------------|------|------|--------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | | 1.45 | | | 0.057 |
| A1 | | | 0.15 | | | 0.006 |
| A2 | 0.90 | 1.15 | 1.30 | 0.036 | 0.045 | 0.051 |
| b | 0.30 | | 0.50 | 0.011 | | 0.020 |
| c | 0.08 | | 0.22 | 0.003 | | 0.009 |
| D | | 2.90 | | | 0.114 | |
| E | | 2.80 | | | 0.110 | |
| E1 | | 1.60 | | | 0.063 | |
| e | | 0.95 | | | 0.037 | |
| e1 | | 1.90 | | | 0.075 | |
| L | 0.30 | 0.45 | 0.60 | 0.020 | 0.018 | 0.24 |
| L1 | | 0.60 | | | 0.024 | |
| L2 | | 0.25 | | | 0.010 | |
| R | 0.10 | | | 0.004 | | |
| R1 | 0.10 | | 0.25 | 0.004 | | 0.25 |
| theta° | 0° | 4° | 8° | 0° | 4° | 8° |
| theta1° | 5° | 10° | 15° | 5° | 10° | 15° |

8 PINS-DIP (D)

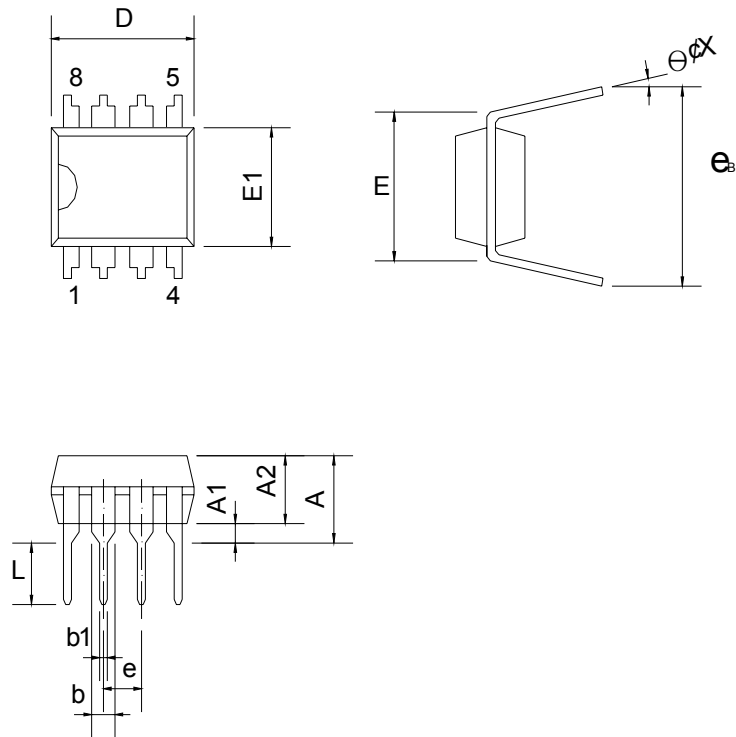

Dimensions:

| Symbol | Millimeter | | | Inch | | |
|----------------|------------|-------|--------|-------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | | 5.334 | | | 0.210 |
| A1 | 0.381 | | | 0.015 | | |
| A2 | 3.175 | 3.302 | 3.429 | 0.125 | 0.130 | 0.135 |
| b | | 1.524 | | | 0.060 | |
| b1 | | 0.457 | | | 0.018 | |
| D | 9.017 | 9.271 | 10.160 | 0.355 | 0.365 | 0.400 |
| E | | 7.620 | | | 0.300 | |
| E1 | 6.223 | 6.350 | 6.477 | 0.245 | 0.250 | 0.255 |
| e | | 2.540 | | | 0.100 | |
| L | 2.921 | 3.302 | 3.810 | 0.115 | 0.130 | 0.150 |
| e _B | 8.509 | 9.017 | 9.525 | 0.335 | 0.355 | 0.375 |
| θ° | 0 | 7 | 15 | 0 | 7 | 15 |


Low-Power Green-Mode PWM Flyback Power Controller without Secondary Feedback

SGP400



TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| | | | |
|--------------------------------------|--|--|----------------------------------|
| ACEX [®] | Green FPS [™] | Power247 [®] | SuperSOT [™] -8 |
| Build it Now [™] | Green FPS [™] e-Series [™] | POWEREDGE [®] | SyncFET [™] |
| CorePLUS [™] | GTO [™] | Power-SPM [™] | The Power Franchise [®] |
| CROSSVOL [™] | i-Lo [™] | PowerTrench [®] | the Power Franchise |
| CTL [™] | IntelliMAX [™] | Programmable Active Droop [™] | franchise |
| Current Transfer Logic [™] | ISOPLANAR [™] | QFET [®] | TinyBoost [™] |
| EcoSPARK [®] | MegaBuck [™] | QS [™] | TinyBuck [™] |
| F [®] | MICROCOUPLER [™] | QT Optoelectronics [™] | TinyLogic [®] |
| Fairchild [®] | MicroFET [™] | Quiet Series [™] | TINYOPTO [™] |
| Fairchild Semiconductor [®] | MicroPak [™] | RapidConfigure [™] | TinyPower [™] |
| FACT Quiet Series [™] | MillerDrive [™] | SMART START [™] | TinyPWM [™] |
| FACT [®] | Motion-SPM [™] | SPM [®] | TinyWire [™] |
| FAST [®] | OPTOLOGIC [®] | STEALTH [™] | μSerDes [™] |
| FastvCore [™] | OPTOPLANAR [®] | SuperFET [™] | UHC [®] |
| FPS [™] |  [®] | SuperSOT [™] -3 | UniFET [™] |
| FRFET [®] | PDP-SPM [™] | SuperSOT [™] -6 | Vcx [™] |
| Global Power Resource SM | Power220 [®] | | |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|------------------------|--|
| Advance Information | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| Obsolete | Not In Production | This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only. |

Rev. 131

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local
Sales Representative