SPSDEVR1-8

Product Preview

Smart Passive Sensors™: SPS UHF Reader Hub

The SPS UHF Reader hub is designed to enable optimized system performance for applications using ON Semiconductor Smart Passive Sensors powered by Magnus® technology. The SPS reader hub is compatible with the UHF EPC global Gen 2 UHF standard. The reader hub supports up to 8 reader antennas connected through standard SMA coaxial connections. RF output power is adjustable from 5 dBm to 30 dBm in 0.5 dBm increments, and the reader supports read rates of up to 100 tags/second and 1 SPS read/second. Maximum read range is 9m when used with appropriate antennas in free space.

The reader supports FCC (902-928 MHZ) and ETSI (865-868 MHz) frequency bands which are configurable by the user. The SPSDEVR1-8 is powered by a Quad-core 64-bit ARM Cortex processor, with on board memory and removable flash storage. The reader also includes connectivity through USB ports and 10/100 Mbps Ethernet.

Features

- Compatible with EPC Global Gen2 UHF Standard
- Support for FCC (902–928 MHZ) and ETSI (865–868 MHz) frequency bands
- Adjustable RF Output Power up to +30 dBm
- 8 RF antenna ports supported
- Connectivity through USB, Wired Ethernet

Table 1. STANDARD OPERATING CONDITIONS

Parameter	Rating	Unit
Operating Temperature Range	-20 to +50	°C



ON Semiconductor®

www.onsemi.com



TBD CASE TBD

ORDERING INFORMATION

Device	Package	Shipping
SPSDEVR1-8	Box	Box

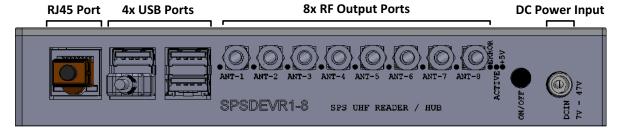


Figure 1. Port Connections

This document contains information on a product under development. ON Semiconductor reserves the right to change or discontinue this product without notice.

SPSDEVR1-8

SPS UHF READER INFORMATION

The SPSDEVR1–8 is a complete reader hub platform for Smart Passive Sensors. Included software is used for basic tag reading and connectivity. Details on the functionality and performance of the reader hub are provided below

Software Functionality

The SPS UHF Reader comes with simple to use software that enables users to quickly read data from Magnus based SPS tags. The included software provides a log of EPC, sensor codes, RSSI value, temperature values, and other data to provide for fast system started and evaluations. Additional software may be available for application specific needs.

Table 2. READER SPECIFICATIONS

Standard Compatibility	EPC Global Gen2 UHF	ISO 18000-6C with DRM ISO 18000-6B (optional)
Operating Frequency	FCC ETSI	902–928 Mhz 865–868 MHz
RF Output Power	5 dBm to 30 dBm	Adjustable in 0.5 dBm steps
RF Antenna Ports	8	SMA 50 Ω connection
VSWR	1.1	
Connectivity	RJ45 (10/100 Base–T Ethernet) 1x USB2.0 Type A console port 3x USB2.0 Type A accessory ports Power Jack	1.7/4.0 mm connector (DC Power)
Read Rate	100 tags/second	
SPS Sensor Read Rate	1 sensor read/second	
Maximum Read Distance	9m	Using 6dBi antenna (36 dBm EIRP)
Max Receive Sensitivity	-62 dBm	
Power Supply Requirements	7.5 V-40.0 V DC, 15W	
Standby Power Consumption	0.250W	
Storage Temperature	-40°C to +85°C	
Dimensions	19.2 cm x 10.3 cm x 3.2 cm 7.6" x 4.1" x 1.3"	
Weight	0.9 kg 2.0 lbs	

NOTE:

Smart Passive Sensor is a trademark of RFMicron, Inc. Magnus is a registered trademark of RFMicron, Inc.

ON Semiconductor and a retrademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify an

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your loca Sales Representative

^{1.} RF output power adjustable through provided user software. User is responsible to ensure that appropriate antenna is selected to remain compatible with maximum system RF output power